


Item 4, Parent: 3.

ns 4 (realized)

resp init

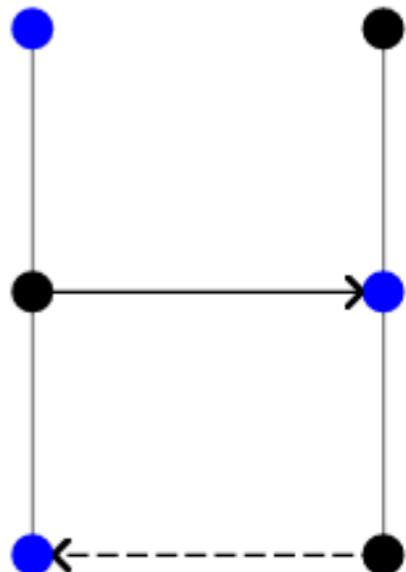

```
(defskel ns
  (vars (n2 n1 text) (a b b-0 name))
  (defstrand resp 3 (n2 n2) (n1 n1) (b b) (a a))
  (defstrand init 3 (n1 n1) (n2 n2) (a a) (b b-0))
  (precedes ((0 1) (1 1)) ((1 2) (0 2)))
  (non-orig (privk a) (privk b))
  (uniq-orig n2)
  (operation nonce-test (added-strand init 3) n2 (0 2)
    (enc n1 n2 (pubk a)))
  (label 4)
  (parent 3)
  (unrealized)
  (shape)
  (maps ((0) ((a a) (b b) (n2 n2) (n1 n1))))
  (origs (n2 (0 1))))
```